

Collision Avoidance System CAS-M light

www.bosch-motorsport.com



- ▶ Radar sensor with integrated logic
- ▶ Warning for overtake situations
- ▶ Easy system adaptation
- ▶ Universal CAN interface for various displays
- ▶ Visualization via display LEDs

The collision avoidance system CAS-M light helps the driver to focus on the track and warns him if a car is approaching from behind. The system provides information about relative speed and distance of the closest vehicle on the CAN bus. An additional display with CAN bus interface is required (e.g. DDU 9).

The information is based on a Bosch radar sensor which contains a FMCW radar transceiver operating in the globally harmonized frequency range of 76.0 – 77.0 GHz. Targets in front of the sensor are reflecting the radar signal and the relative speed and distance is determined via Doppler-effect and beat frequency. The benefit is even more increased during darkness or in bad weather conditions. The system interface is very intuitive and adaptable to the drivers liking.

Application

Operating temperature	-40 to 85°C
Storage temperature	-20 to 95°C
Range	150 m
Tracks	1 Object (nearest)
Interface	CAN

CAN rate	500 kBaud or 1 MBaud
CAN update rate	50 Hz

Technical Specifications

Mechanical Data

Weight of radar sensor MRR	199 g
Size	60x70x32 mm
Vibration	Randome vibration aeff = 30.8 m/s ² , 3x8 h (according ISO/DIS 16750-3)
Kind of protection	IP 6K6K (DIN 40 050) IP 6K7 (DIN 40 050)

Electrical Data

Supply voltage	6.5 to 18 V
An external fuse has to be provided (rec. 10 A). External overvoltage protection is required (internal overvoltage protection up to 35 V).	
Reverse polarity voltage protection	-14 V max. t ≤ 60 sec

Connectors and Wires

Mating connector	F 037 B00 168-01
Pin 1	GND
Pin 2	CAN-H
Pin 3	CAN-L
Pin 4	n.c.
Pin 5	n.c.
Pin 6	n.c.
Pin 7	n.c.
Pin 8	V+

Installation Notes

The system includes a radar sensor and a detailed user manual.

Ordering information for suitable wiring looms for the different CAS-M light packages are specified in the user manual.

The system needs to be connected to the vehicle CAN bus (connection to display needed) and supplied with 12 V from the supply system on board.

See CAS-M light in action on <http://youtu.be/EzpSy-eJRi4>

Ordering Information

Collision Avoidance System CAS-M light (500 kBaud)

Order number **F 02U V02 021-01**

Collision Avoidance System CAS-M light (1 MBaud)

Order number **F 02U V02 220-01**



Collision Avoidance System CAS-M light incl. Display DDU 9 (500 kBaud)

Order number **F02U V02 591-01**

Collision Avoidance System CAS-M light incl. Display DDU 9 (1 MBaud)

Order number **F 02U V02 592-01**

Dimensions

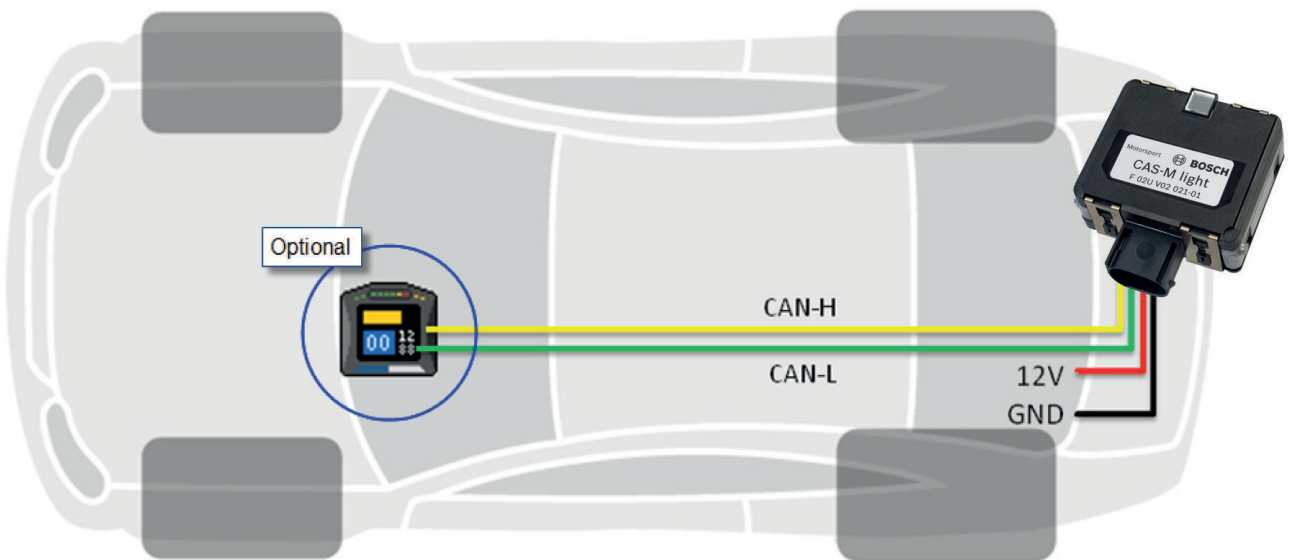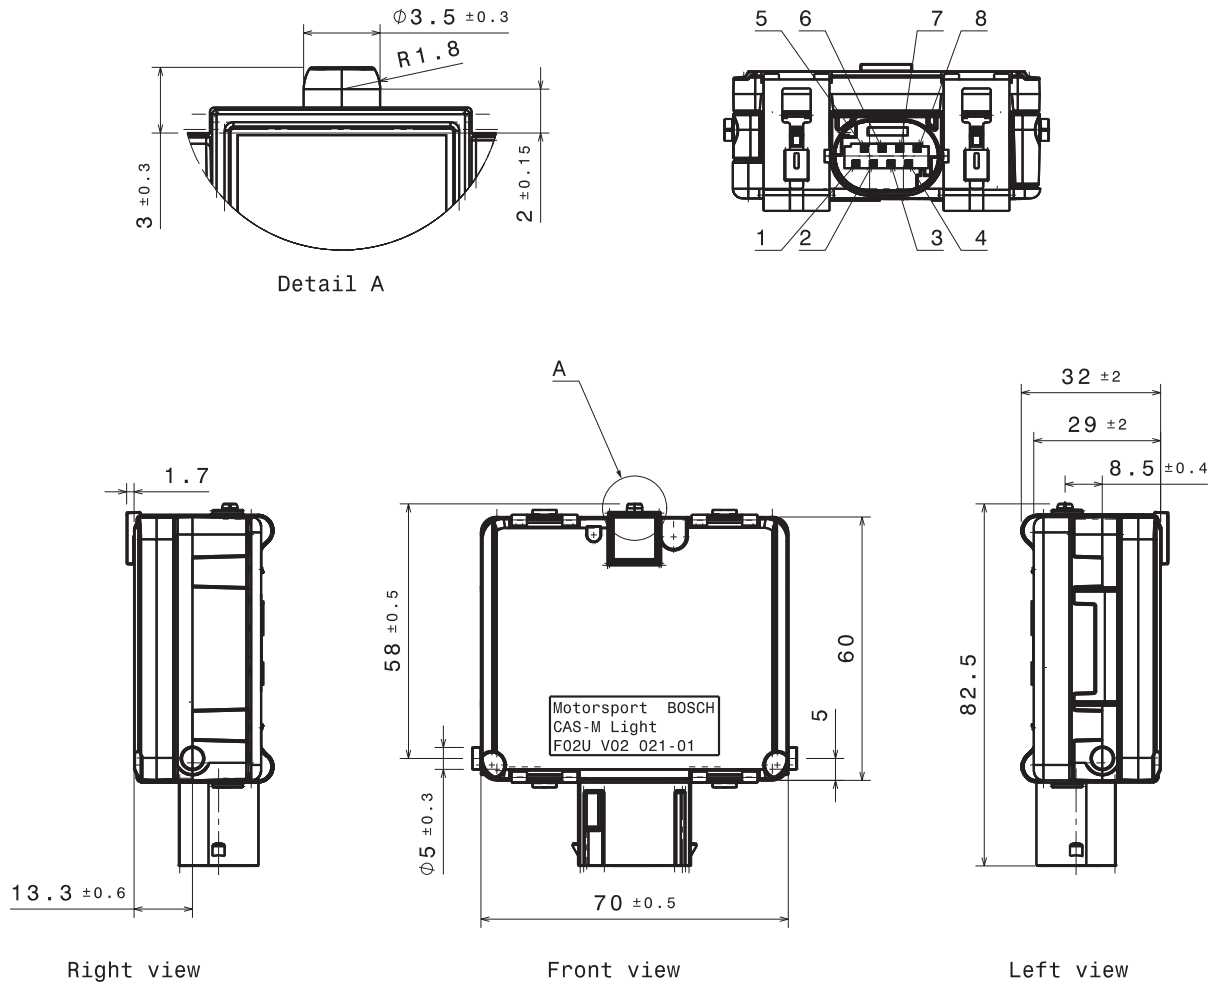

Wiring schematic

Represented by:

Europe:
Bosch Engineering GmbH
Motorsport
Robert-Bosch-Allee 1
74232 Abstatt
Germany
Tel.: +49 7062 911 9101
Fax: +49 7062 911 79104
motorsport@bosch.com
www.bosch-motorsport.de

North America:
Bosch Engineering North America
Motorsport
38000 Hills Tech Drive
Farmington Hills, MI 48331-3417
United States of America
Tel.: +1 248 876 2977
Fax: +1 248 876 7373
motorsport@bosch.com
www.bosch-motorsport.com

Latin America:
Robert Bosch Ltda
Motorsport
Av Juscelino Kubitscheck de
Oliveira 11800
Zip code 81460-900
Curitiba - Parana
Brasilia
Tel.: +55 41 3341 2057
Fax: +55 41 3341 2779

Asia-Pacific:
Bosch Engineering Japan K.K.
Motorsport
18F Queen's Tower C, 2-3-5 Minato Mirai
Nishi-ku, Yokohama-shi
Kanagawa 220-6218
Japan
Tel.: +81 45 650 5610
Fax: +81 45 650 5611
www.bosch-motorsport.jp

Australia, New Zealand and South Africa:
Robert Bosch Pty. Ltd
Motorsport
1555 Centre Road
Clayton, Victoria, 3168
Australia
Tel.: +61 (3) 9541 3901
motor.sport@au.bosch.com