

μ LC Test System

www.bosch-motorsport.com



- ▶ User-friendly interface
- ▶ Customer defined features feasible
- ▶ Prepared for test automation
- ▶ Favorable test setup, consuming low space
- ▶ Simulation of typical automotive interfaces combined in one unit

The new and modern hardware-in-the-loop test system μ LC Test System is suitable for mobile application, measuring a compact 17 cm x 11 cm x 6 cm. Initial test setup typically takes under ten minutes, since the system allows for a simple test setup.

It is a compact open-loop test system for quality assurance of control unit development and combines the simulation of all typical automotive sensors and communication protocols in one unit. Its interface is user-friendly and enables an easy operation and evaluation. The μ LC Test System is especially used for automotive control units with typical interfaces for sensors and bus systems such as analogue/digital inputs and outputs, PWM signals, SENT, CAN, LIN and speed sensors.

Functions

Engine Speed Simulation

- Up to 20,000 rpm
- Supported sensors: Hall, inductive, DG23i, TL4953
- Up to 2 crankshafts, up to 4 camshafts
 - each is independently configurable
 - auxiliary shaft
 - -180 to 180° camshaft adjustment
- Oscilloscope trigger signal for easier monitoring
- Error simulation for engine position management EPM

Vehicle Buses

- 2 * CAN, up to 1 MBit/s
switchable 120 Ohm CAN bus terminator
- LIN Master/Slave

- SENT, full J2716 Jan. 2012 standard
4 Outputs, alternative to PWM output

Digital Interfaces

- 6 * Digital Out, max. 200 mA in total
Output modes: Ground, 12 V, High impedance
- 2 * Relays, max. 10 A, separate ECU power supply possible and incl. main relay sensing
- 2 * PWM input, 1 Hz to 20 kHz
- 4 * PWM output, max. 90 mA in total,
0.1 Hz to 20 kHz
Output voltages: 12 V, 5 V, GND
- Complex PWM with sub signals, each separately adjustable in frequency, duty cycle and pulse count


Analogue Interfaces

- 8 * 10 bit DAC 0 to 5 V, max. 5 mA
Internal or external supply
- 4 * 12 bit DAC 0 to 5 V, max. 5 mA
- 6 * 12 bit ADC 0 to 40 V, GND reference

Additional Features

- Cylinder pressure simulation
 - Up to 8 cylinders with one device
 - Expandable with multiple devices
- USB connection completely galvanic decoupled
- All in- and outputs short-circuit protected and ESD protected
- EMC tested
- Expansion boards for additional HW features
- Multi device support with sync option for engine speed signals

Test Setup

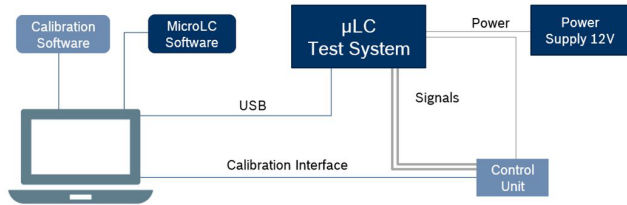

Note: Calculation intensive modules like cylinder pressure simulation can cause a limitation of e.g. the max. engine speed.

Ordering Information

μ LC Test System

Order number **F 02U V02 303-02**

Technical Specifications

Operating voltage	12 V DC
Current consumption	typ. < 1 A
ECU voltage	12 V / 24 V DC
ECU current	10 A
Permissible operation temperature	0°C to 40°C
Housing material	Aluminum
Dimensions	175 mm x 107 mm x 61 mm
Weight	690 g



The screenshot shows the MicroLC Software with analog outputs, crank-/ camshaft, RPM and complex PWM.

Represented by:

Europe:
 Bosch Engineering GmbH
 Motorsport
 Robert-Bosch-Allee 1
 74232 Abstatt
 Germany
 Tel.: +49 7062 911 9101
 Fax: +49 7062 911 79104
 motorsport@bosch.com
 www.bosch-motorsport.de

North America:
 Bosch Engineering North America
 Motorsport
 38000 Hills Tech Drive
 Farmington Hills, MI 48331-3417
 United States of America
 Tel.: +1 248 876 2977
 Fax: +1 248 876 7373
 motorsport@bosch.com
 www.bosch-motorsport.com

Latin America:
 Robert Bosch Ltda
 Motorsport
 Av Juscelino Kubitschek de
 Oliveira 11800
 Zip code 81460-900
 Curitiba - Parana
 Brasilia
 Tel.: +55 41 3341 2057
 Fax: +55 41 3341 2779

Asia-Pacific:
 Bosch Engineering Japan K.K.
 Motorsport
 18F Queen's Tower C, 2-3-5 Minato Mirai
 Nishi-ku, Yokohama-shi
 Kanagawa 220-6218
 Japan
 Tel.: +81 45 650 5610
 Fax: +81 45 650 5611
 www.bosch-motorsport.jp

Australia, New Zealand and South Africa:
 Robert Bosch Pty. Ltd
 Motorsport
 1555 Centre Road
 Clayton, Victoria, 3168
 Australia
 Tel.: +61 (3) 9541 3901
 motor.sport@au.bosch.com